

## OWNER'S MANUAL

### LIFEPO4 BATTERY CHARGER

120W  180W

240W  360W

600W  900W


**Please read this manual carefully before use!**

Subject to change without prior notice, please feel free to contact us for latest information

#### F. Environmental Conditions:


Storage Temperature **(-40~70)°C**      Operating Temperature **(-5~45)°C**  
Relative Humidity **90%(4±2%)**      Atmospheric Pressure **(70~106)kPa**

#### G. Product Diagram:

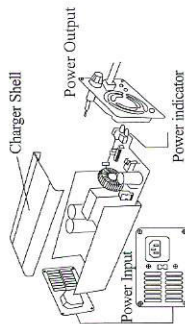

#### H. Application Area:

Chargers are widely used in E-bike, Electric cars, Forklifts, Electric cars, Electric toy cars, Electric bumper cars, Golf carts, Scooters, Wheelchairs, LiFePO4 batteries and so on.

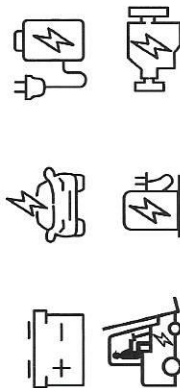

#### **DONGGUAN WALI ELECTRONIC CO.LTD**

Tel: 0769-85189550  
Mobile: +86 185 7665 2207  
Email: 18576652207@163.com  
Website: www.waouks.com  
Address : 901, 9/F, No.9, 10 Lane, DaKeng, Huaide, HuMen, DongGuan, GuangDong, CHINA

## A. Features:

1. Advanced high frequency switching mode power supply technology.
2. DC output isolated from AC input .
3. Single input 110Vac and 220Vac or Universal Input 110/220Vac, 50Hz~60Hz.
4. Charging parameters are insensitive to the AC input line voltage variations.
5. Completely automatic battery charging: CC, CV.
6. 2 LEDs: LED1 Red (power on), LED2 Red/green (charging/full).
7. Short circuit, over voltage, over-temperature, reverse polarity protections.
8. Efficiency  $\geq 90\%$ .
9. Forced ventilation with fans.
10. 100% full load burn-in test.


## B. Operations:

1. Check if your local mains supply conforms to charger's input voltage 110 or 220V. Then connect the charger system to a wall socket. If charger has switch with OFF position, it MUST be set to ON.
2. LED1 RED confirms AC power on, and the LED2 GREEN confirms charger connects well.
3. Connect the plug or the DC Output cord to battery terminals.  
LED2 RED confirms charger is charging, LED2 GREEN confirms battery fully charged  
(N → Positive + ; L → Negative - ; Brown → +ve terminal, Blue → -ve terminal).

**Note: If this charger with a Relay for Reverse Polarity Protection, it doesn't have output voltage and current when charger AC power on but disconnecting with the battery. It will have voltage and current output when it connects with battery.**

## C. Charging Mode(2-stage):

Step 1: CC(Constant Current) Step 2: CV(Constant Voltage)

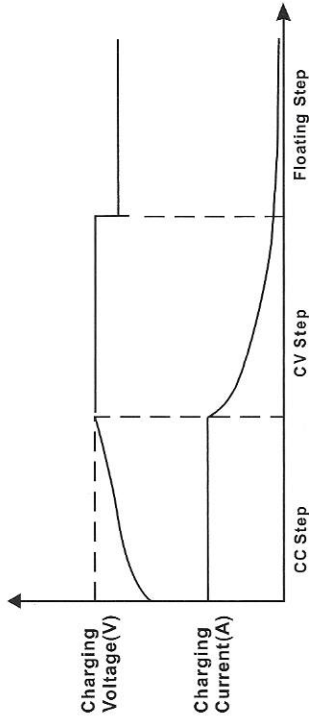

## D. Precautions:

1. The phenomenon of Sparking is normal when it connects to battery because of high current.
1. This charger is designed for charging LiFePO4 batteries only.
2. Avoid charging the wrong type of battery.
3. The battery may be damaged if LED<sub>2</sub> cannot be changed to green after a long time of charging.
4. Always place the charger in well-ventilated and dry environments.
5. The charger is designed with aluminum case as its heat sink. Do not cover it to avoid the case from being over heated while charging.
6. Please attention to DC terminal:

**Brown → (+) Positive Terminal, Blue → (-) Negative Terminal**

7. DO NOT disassemble charger. Take it to a qualified service person when service or repair is required.

## E. Packing List:

1. Charger 1pcs
2. User manual 1pcs
3. Direct wired DC wires
4. AC power cord